



**DESCRIPTION**

A compact pressure switch utilizing a high quality snap action micro switch for applications in which price and size are of concern. Suitable for pneumatic, water, and low pressure hydraulic applications. Its modular design allows for a variety of electrical and mechanical terminations.

**FEATURES**

- Low pressure switch
- Factory set or field adjustable
- Compact size
- Cost effective

**APPLICATIONS**

- Pneumatic system control
- Low pressure filter monitoring
- Car washes
- Gate control

\* UL available for certain models


**Specifications**

Electrical	5A [12/24 VDC, 125 VAC] or 3A [250 VAC]
Switch Type	Snap Action
Protection	DIN 43650A - IP65, Terminals - IP00
Temperature Range	-20°F to 180°F (-29°C to 82°C) Nitrile
Mechanical Range	1,000,000 Cycles @ 75 PSI (5.2 BAR)
Diaphragm Material	Standard: Nitrile Optional: Viton, EPDM, HNBR
Housing Material	Brass (Optional Stainless Steel)
Maximum Overpressure	350 PSI (24 BAR)
Repeatability	+/- 2% of full set point range
Differential	6 - 20% of setting
Weight	0.26 lbs (0.12 kg)

**Pressure Range**

Model	Adjustment Range	
	PSI	BAR
1	3 - 7	0.2 - 0.5
2	5 - 30	0.3 - 2.1
3	25 - 150	1.7 - 10

**Dimensions**

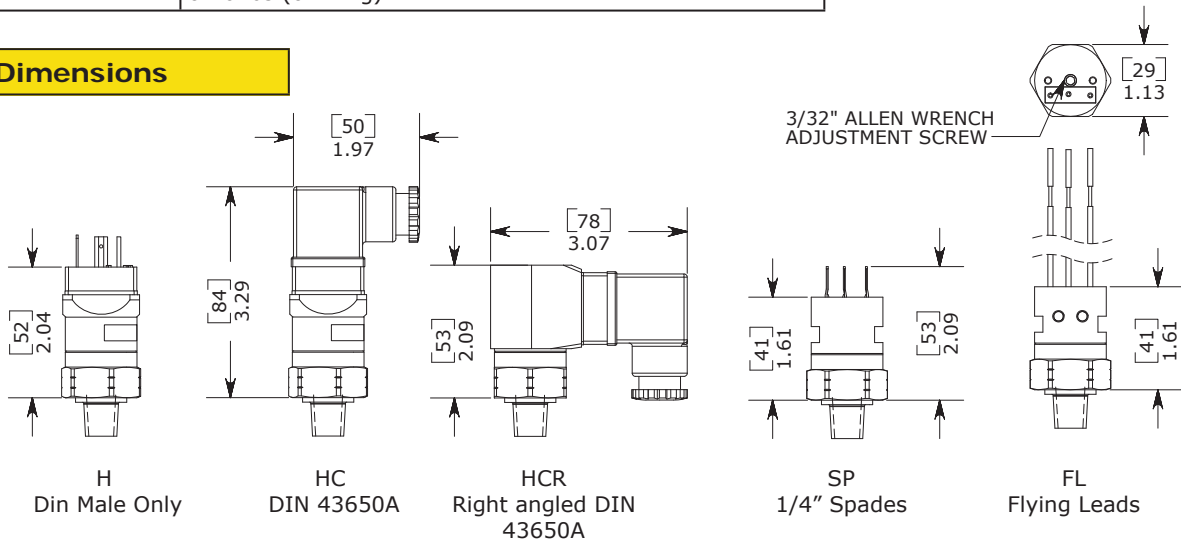

**Wiring Code**

CONTACT	FLYING LEADS	DIN 43650 TYPE	FLWF / FLWM WEATHERPACK	FLDR / FLDP DEUTSCH RECEPTACLE / PLUG
COMMON	BLACK	PIN 1	PIN A	PIN A / PIN 1
NORMALLY CLOSED	BLUE	PIN 2	PIN C	PIN C / PIN 2
NORMALLY OPEN	RED	PIN 3	PIN B	PIN B / PIN 2

**Ordering Information**

Field Adjustable

SPA - <sup>1</sup>2 - <sup>2</sup>2M - <sup>3</sup>C - <sup>4</sup>HC - <sup>5</sup>1

**1 - Pressure Selection:**

Field Adjustable - Select Model Code

Model	Adjustment Range	
	PSI	BAR
1	3 - 7	0.21 - 0.5
2	5 - 30	0.3 - 2.1
3	25 - 150	1.7 - 10

Insert set point value XXX followed by: R, F, BR, or BF

Setpoint	Direction	Description
XXXX	<b>R</b>	PSI Rising Pressure
	<b>F</b>	PSI Falling Pressure
	<b>BR</b>	BAR Rising Pressure
	<b>BF</b>	BAR Falling Pressure

OR

**2 - Thread Options:**

- 2M** - 1/8 NPT male
- 4M** - 1/4 NPT male
- 2G** - 1/8 BSPP male, G1/8
- 4G** - 1/4 BSPP male, G1/4
- 4S** - 7/16-20 SAE male, with O-ring seal
- 6S** - 9/16-20 SAE male, with O-ring seal
- M10** - M10 X 1.0 male
- M12** - M12 X 1.5 male

**3 - Circuit:**

- A** - SPST (Normally Open)
- B** - SPST (Normally Closed)
- C** - SPDT (Single Pole Double Throw : Normally Open and Normally Closed)

**4 - Electrical Termination:**

- H** - DIN 43650A - connector type - male half only (only available in SPDT option)
- HC** - DIN 43650A - connector type (only available in SPDT option)
- HR** - 90 Degree DIN 43650A - connector type - male half only (only available in SPDT option)
- HCR** - 90 Degree DIN 43650A - connector type (only available in SPDT option)
- HN** - DIN 43650A 1/2" NPT Conduit (only available in SPDT option)
- HNR** - 90 Degree DIN 43650A 1/2" NPT Conduit (only available in SPDT option)
- FL** - Flying Lead 18" long, 18 AWG
- FLWF** - Flying Lead Weatherpack connector, female, 10" long leads
- FLWM** - Flying Lead Weatherpack connector, male, 10" long leads
- FLDP** - Flying Lead Deutsch connector, plug, 10" long leads
- FLDR** - Flying Lead Deutsch connector, receptacle, 10" long leads
- SP** - 1/4" Spade

**5 - Options:**

- 1** - Viton® Diaphragm
- 2** - EPDM Diaphragm
- 3** - 316 Stainless Steel Housing
- 4** - HNBR Diaphragm
- 7** - Gold Contact, Snap Action Microswitch @ 20 mA/12 VDC
- 8** - 10 amp, Snap Action Microswitch @ 10(2) 125 VAC (inductive)
- 20** - Seal Adjustment Screw
- OC** - Oxygen Cleaned Switches
- SR** - Snubber

Note: Please see page 42 for other available options

